


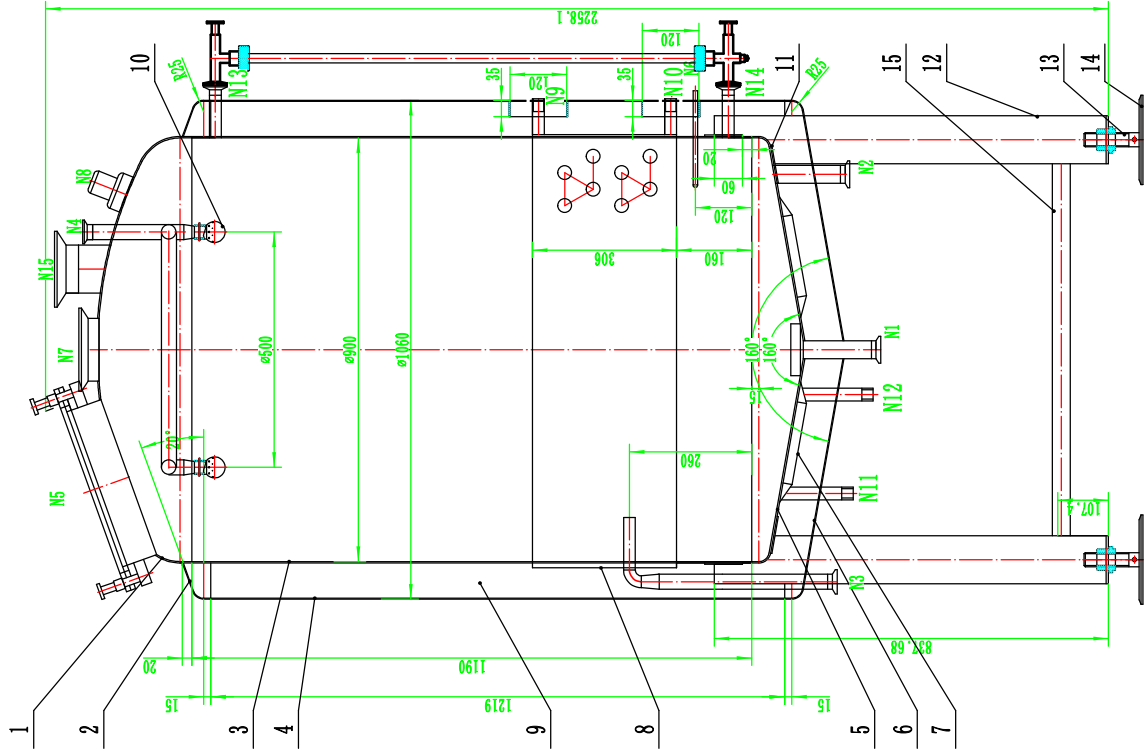

Pipelines

Suple	Size	Connect	用途 Use
N1	1.5" ($\phi 38$)	卡箍Clamp	物料口Material outlet port
N2	1.5" ($\phi 38$)	卡箍Clamp	上物料口Material outlet port
N3	1.25" ($\phi 32$)	卡箍Clamp	旋沉进口Whirlpool inlet port
N4	1.25" ($\phi 32$)	卡箍Clamp	洗涤口Cleaning port
N5	$\phi 350$		玻璃人孔Glass manhole
N6	$\phi 10$		温度计盲管Thermometer blind tube
N7	$\phi 133$	卡箍Clamp	排汽口Exhaust port
N8	$\phi 80$		视灯 (带电源) LED light(with power supply)
N9	G1	内丝Inner thread	筒体蒸汽进口Cylinder steam inlet
N10	G3/4	内丝Inner thread	筒体冷凝水出口Cylinder condensate outlet
N11	G1	内丝Inner thread	下锥蒸汽进口lower cone steam inlet
N12	G3/4	内丝Inner thread	下锥冷凝水出口lower cone steam outlet
N13	$\phi 25$	卡箍Clamp	液位计接口Level indicator interface
N14	$\phi 25$	卡箍Clamp	液位计接口Level indicator interface
N15	$\phi 102$	卡箍Clamp	酒花添加罐接口Hop dosing tank interface

技术要求

1. 总容积: 650L, 有效容积: 500L; 换热面积: 1.2㎡; Total volume: 650L, effective volume: 500L; heat exchange area: 1.2㎡;
2. 封头内外抛光至0.6 μm , 其余均做好板面保护, 焊缝处抛40mm细砂光带, 支腿与外包下锥之间满焊;
3. 焊接采用氩弧焊, 具体要求参见《焊接作业指导书图集》;
4. 制作完毕, 夹套试压试漏, 夹套试验压力0.4MPa; 筒体盛水试漏;

