

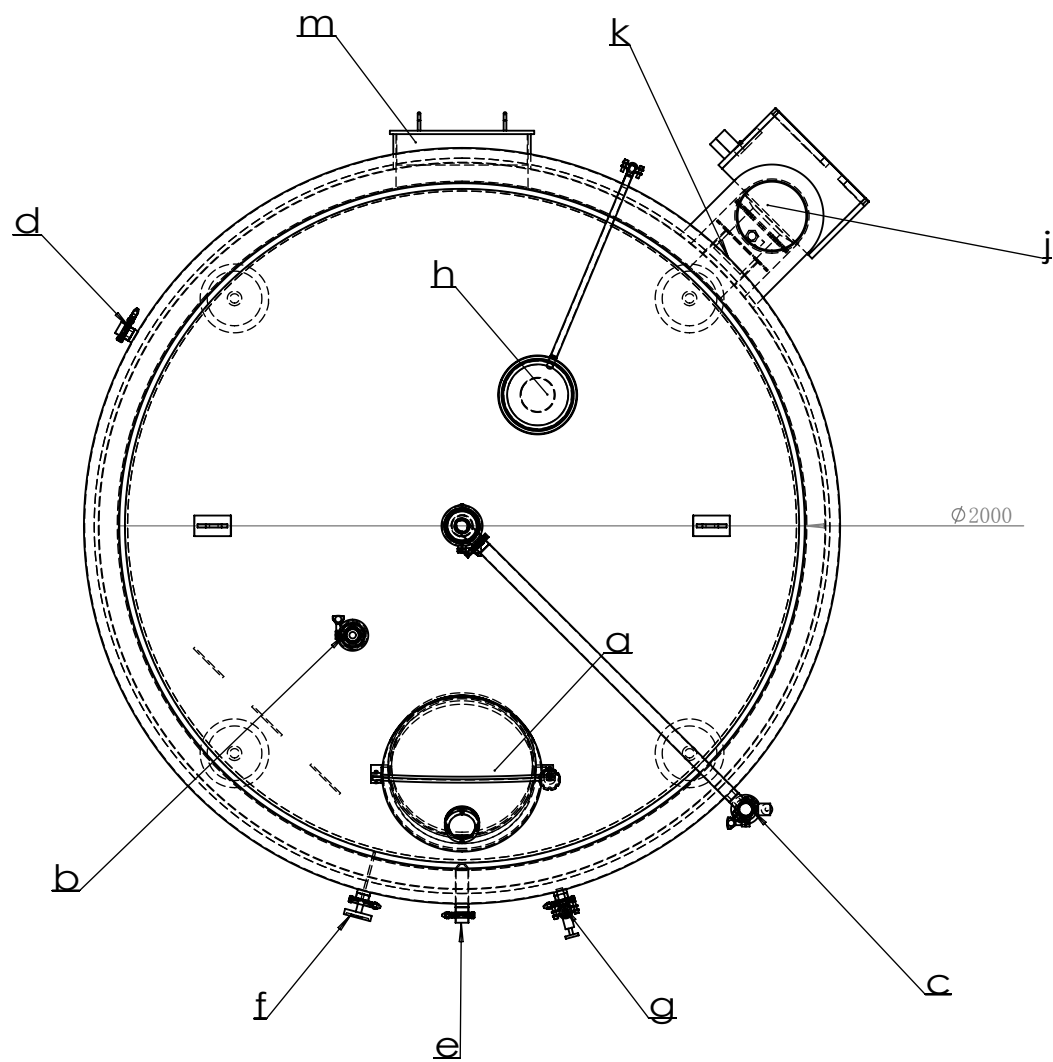


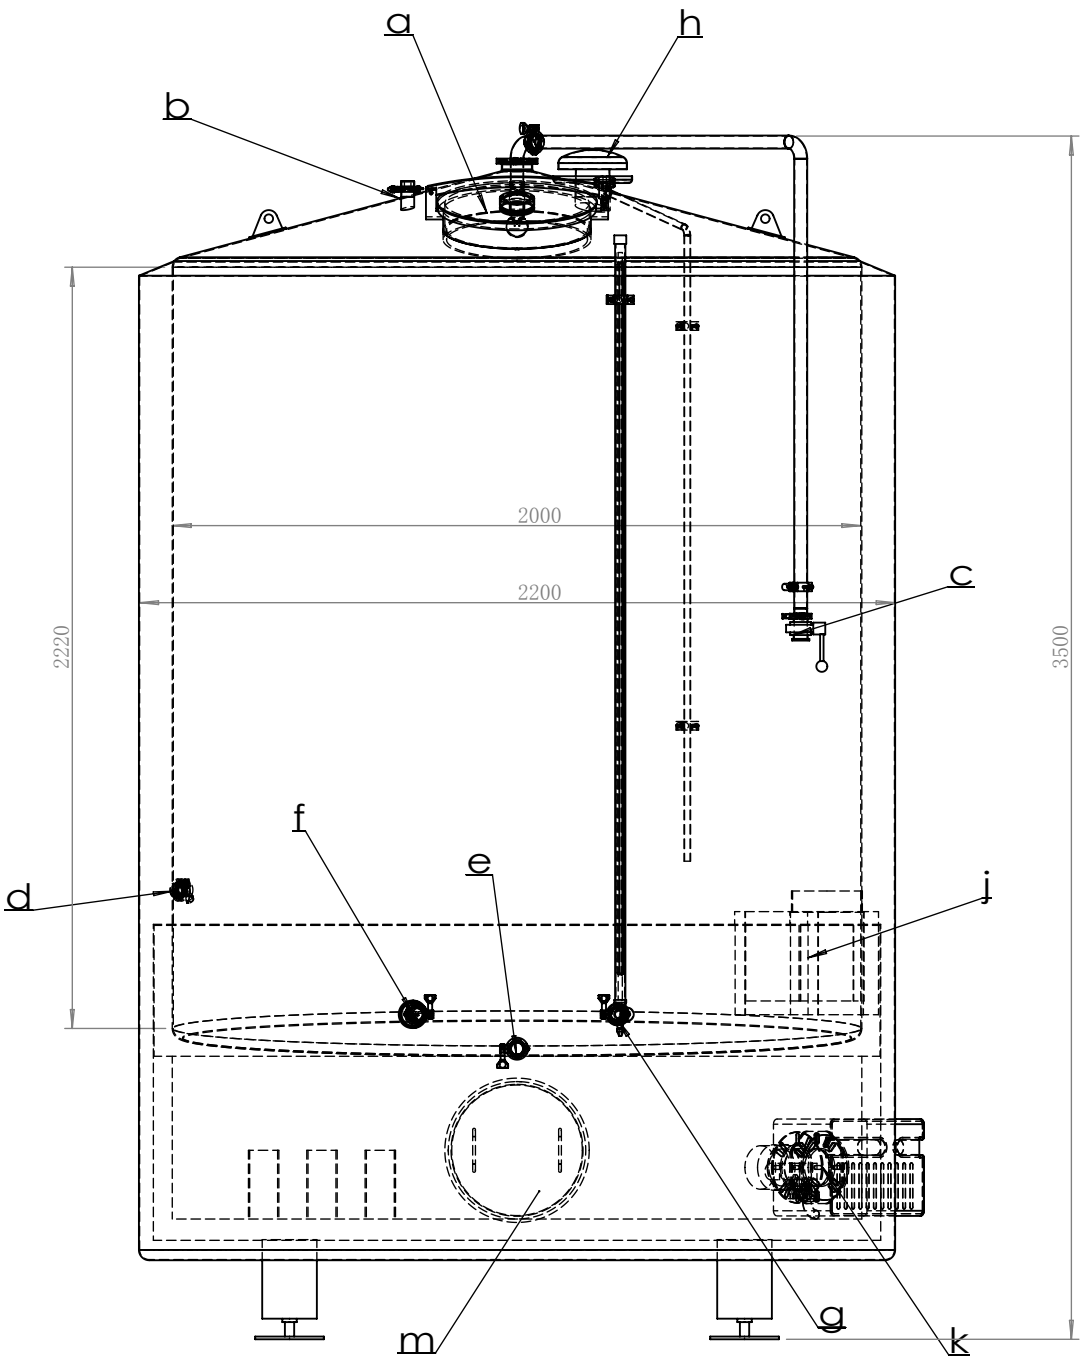

DESIGN DATA SHEET			
DESIGN PARAMETERS			
VESSEL CLASS		PRESSURE	
PARAMETER NAME		VESSEL	/
WORKING PRESSURE	Mpa	NORMAL PRESSURES	/
DESIGN PRESSURE	Mpa	NORMAL PRESSURES	/
WORKING TEMPERATURE	℃	-5~100℃	
DESIGN TEMPERATURE	℃	-10~100℃	
MEDIUM		BEER	/
MEDIUM DENSITY	Kg/m³		
MATERIAL		304	/
GROSS VOLUME	HL	70.2	
NET VOLUME	HL	65	
SAFETY VALVE ACT PRESSURE	Mpa	/	
HEAT EXCHANGE AREA	m²		
INSULATION MATERIAL		PU	
INSULATION THICKNESS	mm	100	
PRESSURE TEST	Mpa	/	/
AIR-TIGHTNESS TEST	Mpa		

TABLE				
NO.	NAME	CONNECT SIZE	CONNECT TYPE	REMARKS
a	YAB-MANHOLE	Φ430	Q-OPEN	
b	INLET	Φ38.1X1.5	CLAMP	
c	CIP	Φ38.1X1.5	CLAMP	
d	TEM-SENSOR	Φ38.1X1.5	CLAMP	
e	OUTLET	Φ38.1X1.5	CLAMP	
f	TEM-GAGE	Φ38.1X1.5	CLAMP	
g	LEAVEL PORT	Φ38.1X1.5	SCREW	
h	EXHAUST CAP	Φ101.6X2	WELD	
j	CHIMNEY	Φ204X3	PIPE	
k	BURNER	Φ210X3	FLANGE	
m	REPAIR	Φ400	FLANGE	

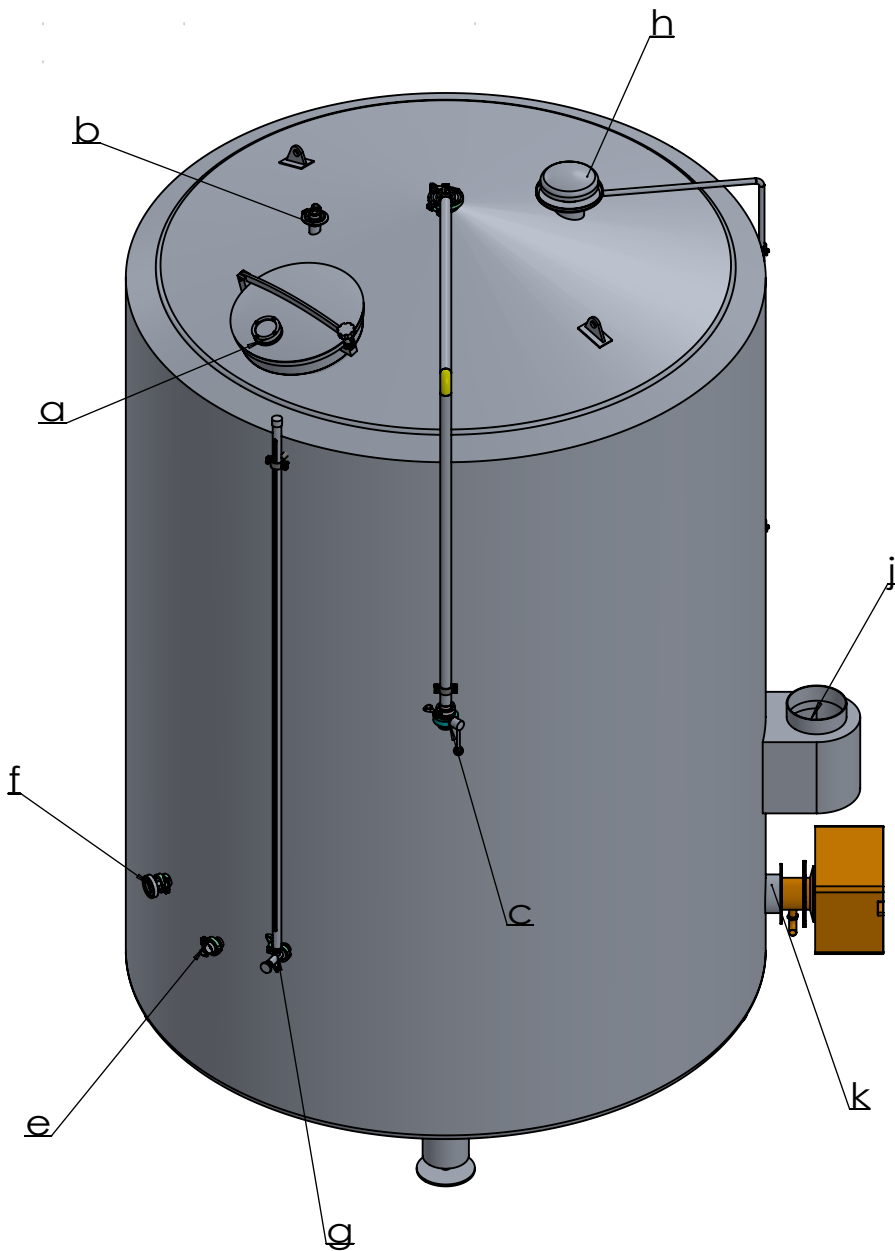

PART NAME			XIANGSHAN LANYUE FOOD MACHINERY CO.,LTD		
65HL HLT(FIRED)					
DRAW		2015-06-16	SCALE	1:24	TOTAL 1 PAGE 1
VERIFY			PROJECTION		PART NO.
CONFIRM			WEIGHT	Kg	R50B20SJ-0Z001