

CONNECTION TABLE		
TAG	DESCRIPTION	CONNECTION TYPE
A1 & A2	CO2 CHILLER RETURN/DPL SKID	1"PS 150# RF FLG
B1 & B2	CO2 CHILLER SUPPLY/DPL SKID	1"PS 150# RF FLG
C1 & C2	DEWAR VENT GAS HEADSPACE/GAS SUPPLY	1/2" ODT CONNECTION
D1 & D2	LIQUID CO2 SKID OUTLET/DEWAR FILL	1/2" ODT CONNECTION
E1 & E2	COMPRESSOR OUTLET/DPL SKID INLET	1"PS 300# RF FLG
F1 & F2	GLYCOL CHILLER RETURN	1"PS 150# RF FLG/3/4"FPT
G1 & G2	GLYCOL CHILLER SUPPLY	1"PS 150# RF FLG/ 3/4"FPT
H1 & H2	DEWAR LIQUID /PUMP INLET	1/2" ODT CONNECTION
J1 & J2	CO2 GAS PUMP PRIMING VENT/ DEWAR PB LINE	1/4" ODT CONNECTION

REVISION HISTORY				
REV	DOC #	DESCRIPTION	BY	APV BY DATE
01	31697	INITIAL RELEASE		

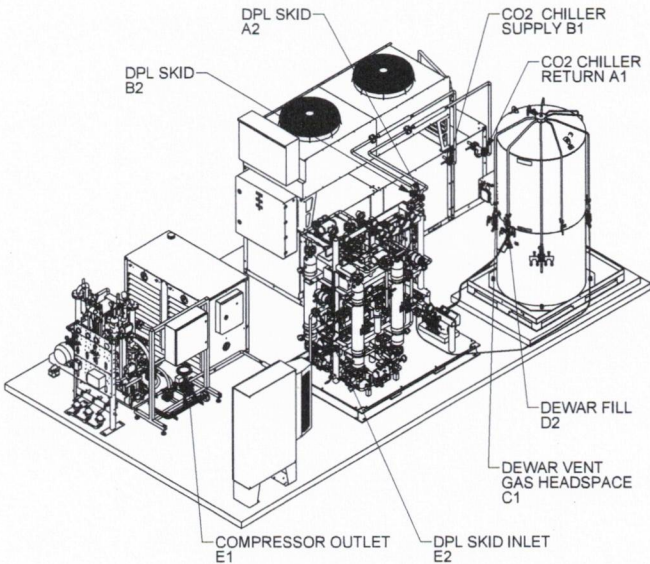
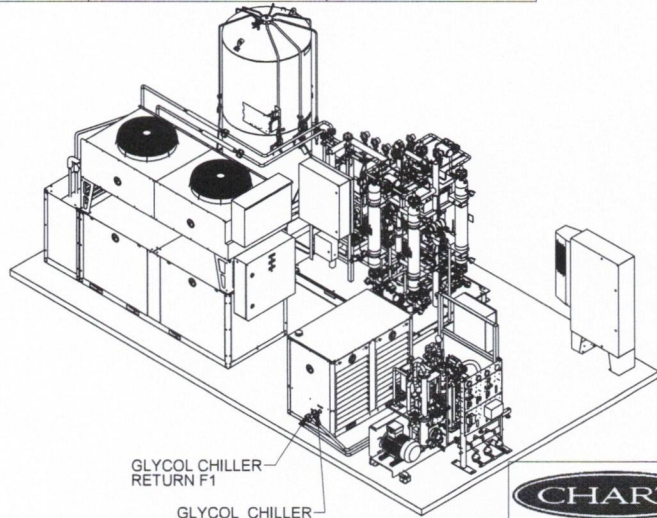


CHART INC.

DRAWN BY: VMD

CHECKED BY: BRS

PROJ ENG: CSH

NO: 8020024

NO: 8020024

NO: 8020024

THIRD ANGLE PROJECTION

UNLESS SPECIFIED: DIMENSIONS IN INCHES, ANGLES IN DEGREES, WEIGHT IN LBS.

TOLERANCES:

FRACTIONS: ± N/A

ANGLES: ± N/A

2 DECIMALS: ± N/A

3 DECIMALS: ± N/A

WEIGHT: ± N/A

NOTE REFERENCE


#

MATERIAL REQUIRED

SEE BOM

THE MATERIAL AND INFORMATION INCLUDING THE PRINCIPLES OF DESIGN CONTAINED IN THIS PRINT, IS THE EXCLUSIVE PROPERTY OF CHART INC., AND IS CONFIDENTIAL AND PROPRIETARY INFORMATION. THIS INFORMATION MAY NOT BE REPRODUCED, COPIED, OR LOANED IN PART OR IN WHOLE, NOR IS THE INFORMATION TO BE RELATED TO ANY PARTY WITHOUT CHART'S WRITTEN CONSENT.

TITLE			
KIT SITE INSTALL			
PART NUMBER 22255503			
DRAWING NUMBER B-22255503-A			
ESTIMATED WEIGHT N/A			
SIZE B	SCALE 1:48	REVISION 01	SHEET 1 OF 3

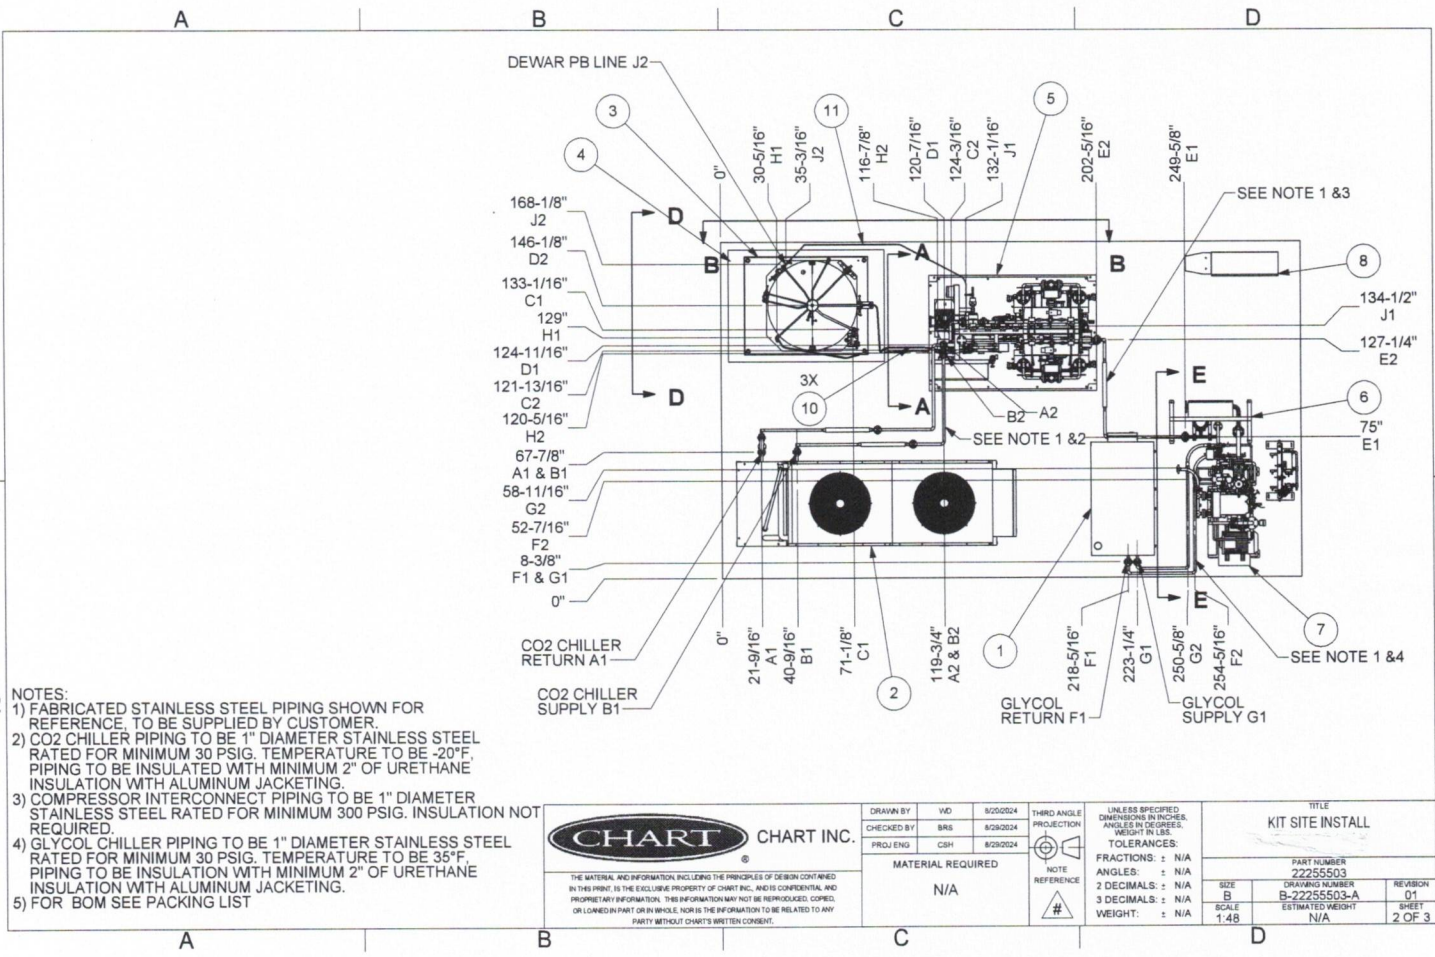

- NOTES:
- 1) FABRICATED STAINLESS STEEL PIPING SHOWN FOR REFERENCE, TO BE SUPPLIED BY CUSTOMER.
 - 2) CO2 CHILLER PIPING TO BE 1" DIAMETER STAINLESS STEEL RATED FOR MINIMUM 30 PSIG. TEMPERATURE TO BE -20°F. PIPING TO BE INSULATED WITH MINIMUM 2" OF URETHANE INSULATION WITH ALUMINUM JACKETING.
 - 3) COMPRESSOR INTERCONNECT PIPING TO BE 1" DIAMETER STAINLESS STEEL RATED FOR MINIMUM 300 PSIG. INSULATION NOT REQUIRED.
 - 4) GLYCOL CHILLER PIPING TO BE 1" DIAMETER STAINLESS STEEL RATED FOR MINIMUM 30 PSIG. TEMPERATURE TO BE 35°F. PIPING TO BE INSULATION WITH MINIMUM 2" OF URETHANE INSULATION WITH ALUMINUM JACKETING.
 - 5) FOR BOM SEE PACKING LIST

	DRAWN BY		WD	M/2005024	THIRD ANGLE PROJECTION	UNLESS SPECIFIED DIMENSIONS IN INCHES, ANGLES IN DEGREES, WEIGHT IN LBS. TOLERANCES: FRACTIONS: : N/A ANGLES: : N/A 2 DECIMALS: : N/A 3 DECIMALS: : N/A WEIGHT: : N/A	TITLE KIT SITE INSTALL	
	CHECKED BY		BRS	M/2005024			PART NUMBER 22255503	
MATERIAL REQUIRED		PROJ. ENG		CSH	M/2005024	NOTE REFERENCE #	REVISION 01	
THE MATERIAL AND INFORMATION INCLUDING THE PRINCIPLES OF DESIGN CONTAINED IN THIS PRINT IS THE EXCLUSIVE PROPERTY OF CHART INC. AND IS CONFIDENTIAL AND PROPRIETARY INFORMATION. THIS INFORMATION MAY NOT BE REPRODUCED, COPIED, OR LOANED IN PART OR IN WHOLE NOR IS THE INFORMATION TO BE RELATED TO ANY PARTY WITHOUT CHART'S WRITTEN CONSENT.		SCALE		1:48			ESTIMATED WEIGHT N/A	
								SHEET 2 OF 3

